

Water Treatment



ATHENA MR 12 Vdc

ELECTROMAGNETIC DOSING PUMPS



Main characteristics

- PVDF PUMP HEAD suitable for chemical used in Industrial, Waste Water Treatment and Potable Water applications
- CERAMIC BALL full chemical compatibility
- PTFE DIAPHRAGM unique life expectancy and compatibility with most chemicals
- POWER SUPPLY: 12 Vdc
- QUICK CONNECTIONS
- MANUAL PRIMING VALVE
- IP65 PROTECTION
- ADJUSTABLE FLOW RATE by the digital control panel
- POWER-ON and LEVEL ALARM LED
- DIGITAL PROPORTIONAL FLOW (AT.MT and AT.PR Pump Functions)
- Constant flow rate manual adjustable
- Proportional flow rate according to:
 - an external signal
 - an analogue signal (4÷20 mA)
 - a digital signal (water meter)
- Batch mode
- Timer function
- Ppm proportional dosing
- Input ON-OFF (remote control)
- pH/Redox Control Meter
- Selectable input for PT100 or PT1000 probe (Thermal-compensation)
- Anti-seepage system

Water Treatment

Athena – Performance data

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT


FLOW RATES	PRESSURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	CONSUMPTION	WEIGHT
3 l/h	10 bar	0,25	4x6	200	6,5 watt	3 kg
4 l/h	8 bar	0,33	4x6	200	6,5 watt	3 kg
5 l/h	5 bar	0,42	4x6	200	6,5 watt	3 kg

Anti-seepage system

The anti-seepage system, is a solution to prevent the intrusion of chemical product inside the pump: leakage and chemical intrusion can happen when the O-ring is damaged or consumed by regular use.

This device is integrated in the hydraulic part, between pump head and body, behind the diaphragm: the outgoing collection channel of the anti-seepage device (see below blue arrow) collects the leakage and expel it out.

When the leakage is visible, the operator can proceed either tightening the 4 bolts of the head (4Nm torque) or disassembling the head and inspect it in order to understand leakage causes .

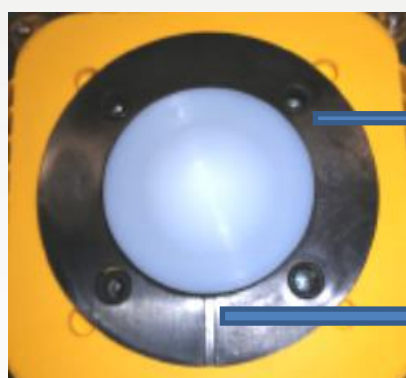


Anti-seepage device

collection channel

Water Treatment

Example of installation

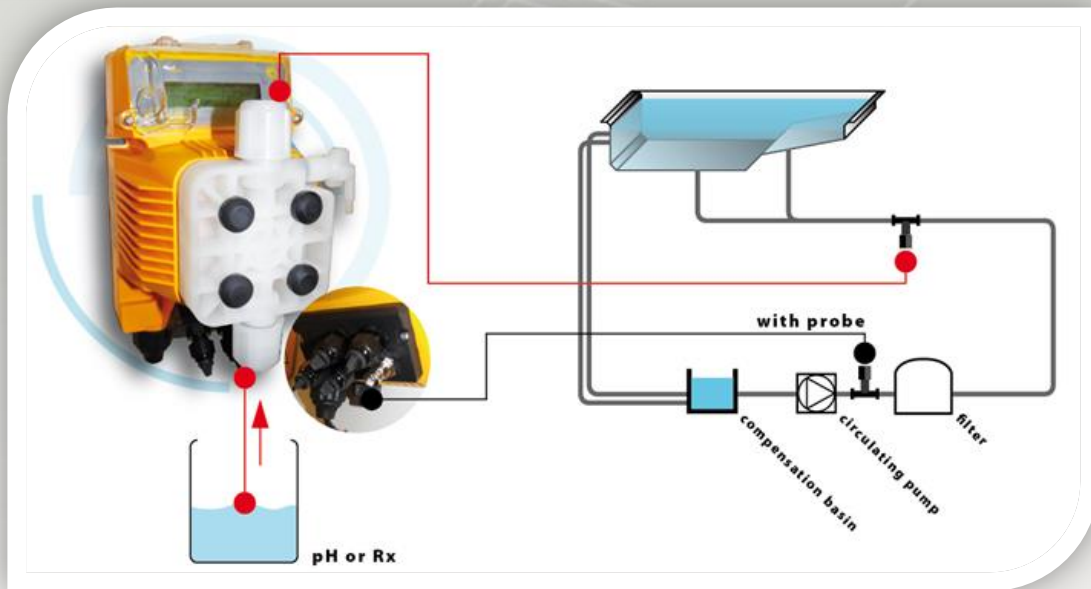

Water Treatment

Installation kit



AC.VSA (ATHENA.1 .2 .3)



- PvdF Pump head with automatic bleed valve
- Flow reduction, according to the quantity of air in the liquid

AC.VM PVDF



- Multifunction valve, antisiphon, backpressure, safety
- PVDF body, PTFE membrane
- Adjustable Pressure 0÷5 bar • Relief Pressure 0÷18 bar

AC.SF



- Flow sensor
- FPM Seals
- 4x6 / 8x12 connections

AC.SL



- Floating level probe with bipolar cable (2 mt) with support

AC.ST



- Horizontal base mounting bracket

PRIMING AID

Capacity



- Capacity: 300 ml
- PVC Body
- FPM seals
- Connection: 4x6mm-8x12mm

AC.VIE



- Extractable injection valve PVC 1/2" g.m. IN - 1/2" g.m. OUT



- Extractable injection valve with ball valve PVC 1/2" g.m. IN - 1/2" g.m. OUT

AC.VS




- Back-pressure valve up to 10 bar
- PTFE diaphragm


Water Treatment



Dimensional drawings

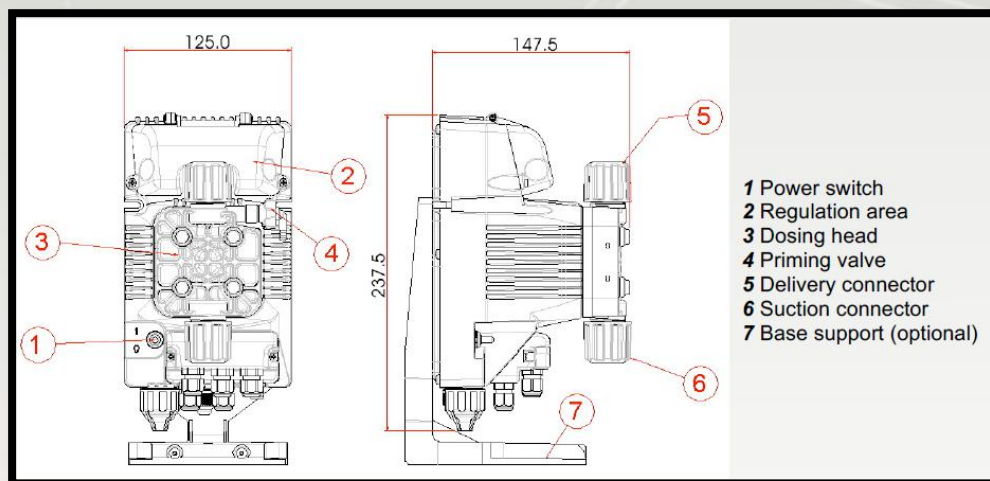

Plumbing

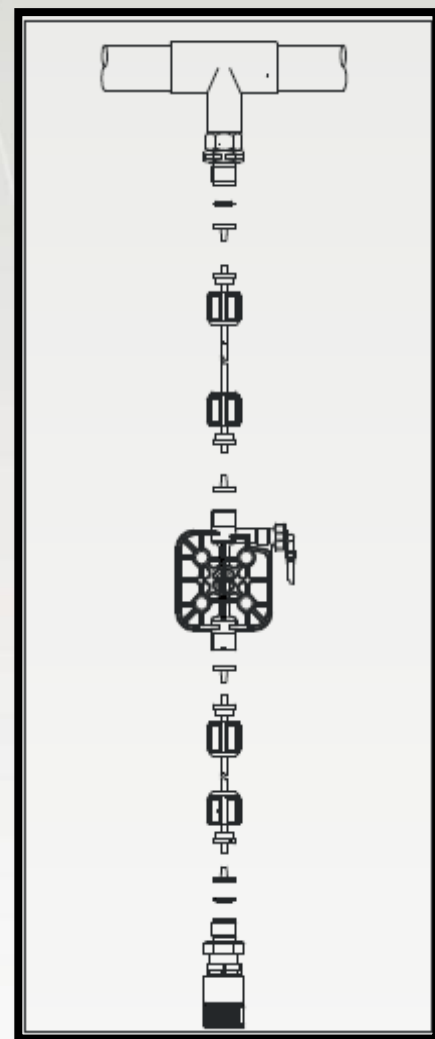

Fixing templates

