


Cleaning System

NIKE FX

ADJUSTABLE ANALOG PUMP




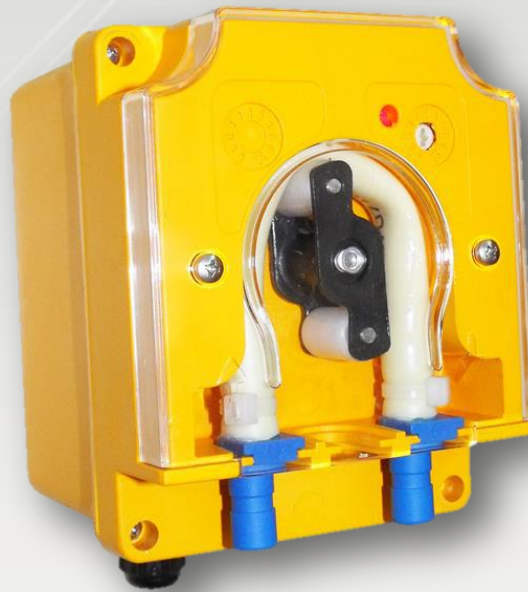


Main characteristics

- SUITABLE FOR HIGH VISCOUS LIQUID INJECTION
- IP 65 PROTECTION DEGREE
- EASY INSTALLATION AND MAINTENANCE
- POWER SUPPLY 100 ÷ 240 or 24 Vac 50/60hz, TRIGGER 100 ÷ 240 or 24 Vac
- EPDM OR SILICON PERISTALTIC HOSE Ø 6,25x10,5 mm
- FLOW RATE 15 L/h - PRESSURE 100 kPa (1 bar – 14,5 psi)

Cleaning System

Dimensional drawing

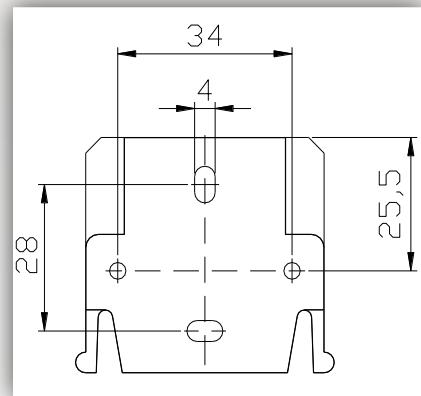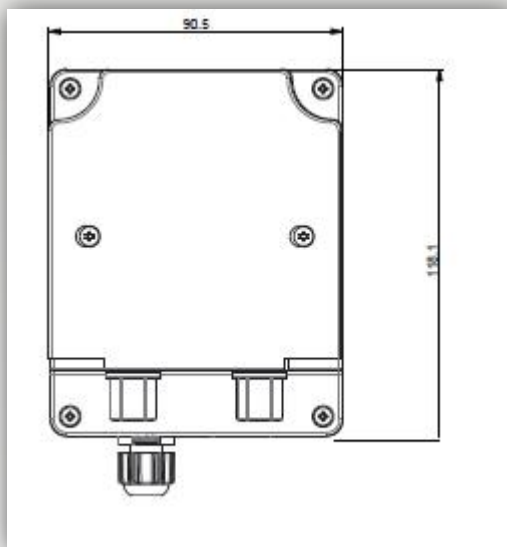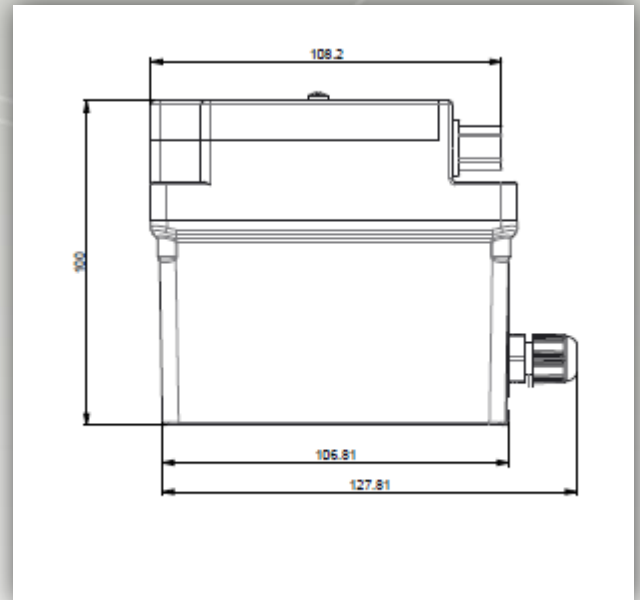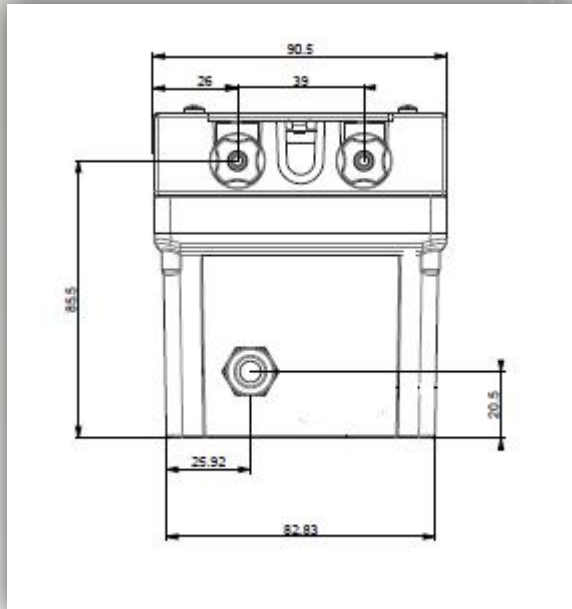

Cleaning System

Optional



0%5584NK

- silicon peristaltic hose



0%5569NKTL

- Santoprene peristaltic hose